redflare
MODEL STUDIOS

# Glowing Sign assembly instructions

The Glowing signage needs to be assembled using an LED Micropanel, which if you have not purchased from Redflare Models will require a 300oHm resistor.

Apply the decal to the white LED panel by soaking the decal in water for 15-20 seconds and sliding onto the panel. Position and wait for the decal to dry.

Paint the elements of the sign using your chosen colors and then wire the micropanel to a 5v or 9v power source. Next, Insert the wires into the hole in the base panel. Glue the sections together using CA glue.

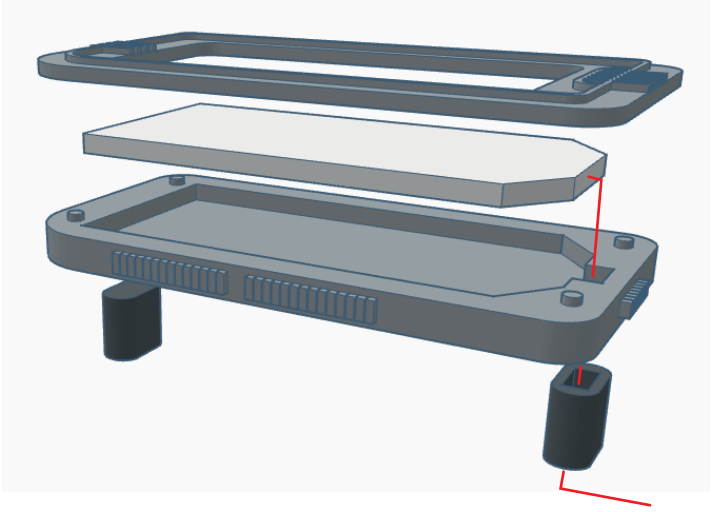

## LED Micropanel and Decals

The Micropanel requires either a 5v or 9v power source to light. Using 9v will be stronger in brightness for the sign.

Decal will need trimming to size and has been printed on high quality white decal paper.